



ATTABOX™

TM

Made in the USA
With Texas Pride

-Protection from dust, rain, sleet, snow, splashing water, waves, hose directed water with superior impact and flame protection!

UL/cUL-508A
UL/cUL-50E

Type 3R,4,4X,12
File: E319779

Rated IP68

Polycarbonate Enclosures



- Best NEMA 4X non-metallic enclosure available today
- Flat lid surface for easy HMI / pilot device mounting
- Latches and hinges do not penetrate enclosure
- Clear and opaque lids
- Easy to remove lid
- High performance inserts
- Integrated lock hasp
- Molded in bosses
- Multi-directional mounting feet

IP68
Type 3R, 4, 4X, 12
Rated F1 UV-light
5VA flammability
UL 1741 Compliant



Side Mount Solutions

- Increases usable space
- Provides more mounting options
 - DIN rails
 - Side panels
 - Equipment
- Aluminum slot nuts
 - Variable mounting heights
 - 10/32 machine screw



Panel Systems


- Sub-panel mounting solution – Revolutionary design
 - Variable height mounting
 - Swings open from any side
 - Panel locks into open position
 - Mounting holes are standard JIC
- 0.08" Aluminum panels
- Back panels are standard JIC





ATTABOX™

TM

Rated IP68
 UL/cUL-508A
 UL/cUL-50E
 Type 3R, 4, 4X, 12
 File: E319779

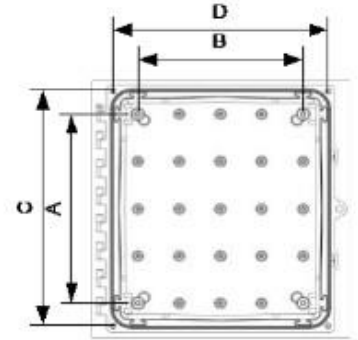

UL1741 Compliant



Part #/Size	Description
Opaque Cover Enclosures	
AH664C6x6x4	Attabox™ Polycarbonate Enclosure with Opaque Cover
AH864C8x6x4	Attabox™ Polycarbonate Enclosure with Opaque Cover
AH108410 x 8 x 4	Attabox™ Polycarbonate Enclosure with Opaque Cover
AH1210612 x 10 x 6	Attabox™ Polycarbonate Enclosure with Opaque Cover
AH1412614 x 12 x 6	Attabox™ Polycarbonate Enclosure with Opaque Cover
AH1614816 x 14 x 8	Attabox™ Polycarbonate Enclosure with Opaque Cover
AH18161018 x 16 x 10	Attabox™ Polycarbonate Enclosure with Opaque Cover



Clear Cover Enclosures	
AH664C6x6x4	Attabox™ Polycarbonate Enclosure with Clear Cover
AH864C8x6x4	Attabox™ Polycarbonate Enclosure with Clear Cover
AH1084C10 x 8 x 4	Attabox™ Polycarbonate Enclosure with Clear Cover
AH12106C12 x 10 x 6	Attabox™ Polycarbonate Enclosure with Clear Cover
AH14126C14 x 12 x 6	Attabox™ Polycarbonate Enclosure with Clear Cover
AH16148C16 x 14 x 8	Attabox™ Polycarbonate Enclosure with Clear Cover
AH181610C18 x 16 x 10	Attabox™ Polycarbonate Enclosure with Clear Cover



Back Panels		
BP66A	6x6	Aluminum Back Panel
BP86A	8x6	Aluminum Back Panel
BP108A	10 x 8	Aluminum Back Panel
BP1210A	12 x 10	Aluminum Back Panel
BP1412A	14 x 12	Aluminum Back Panel
BP1614A	16 x 14	Aluminum Back Panel
BP1816A	18 x 16	Aluminum Back Panel

Swing Panel Kits		
AH66SPK	6x6	Attabox™ 6x6 Swing Panel Kit (comes with mounts, screws and panel)
AH86SPK	8x6	Attabox™ 8x6 Swing Panel Kit (comes with mounts, screws and panel)
AH108SPK	10 x 8	Attabox™ 10x8 Swing Panel Kit (comes with mounts, screws and panel)
AH1210SPK	12 x 10	Attabox™ 12x10 Swing Panel Kit (comes with mounts, screws and panel)
AH1412SPK	14 x 12	Attabox™ 14x12 Swing Panel Kit (comes with mounts, screws and panel)
AH1614SPK	16 x 14	Attabox™ 16x14 Swing Panel Kit (comes with mounts, screws and panel)
AH1816SPK	18 x 16	Attabox™ 18x16 Swing Panel Kit (comes with mounts, screws and panel)

DIN Rail Kits	
AH6DRK	6" Din Rail Kit (includes two nuts, two screws, and din rail)
AH8DRK	8" Din Rail Kit (includes two nuts, two screws, and din rail)
AH10DRK	10" Din Rail Kit (includes two nuts, two screws, and din rail)
AH12DRK	12" Din Rail Kit (includes two nuts, two screws, and din rail)
AH14DRK	14" Din Rail Kit (includes two nuts, two screws, and din rail)
AH16DRK	16" Din Rail Kit (includes two nuts, two screws, and din rail)
AH18DRK	18" Din Rail Kit (includes two nuts, two screws, and din rail)

Accessories	
AHSNK	Slot Nut Kit (includes two nuts & two screws)
AHSPM	Swing Panel Mounts (4 per kit)
AHLK	Latch kit (2 latches per kit) - replacement only
AHAK	Accessory kit (includes all screws, inserts, and mounting feet) - replacement only
4XGlands	Cable glands of all sizes

Custom Solutions Attabox™ custom services - modification & component installations

Enclosure	Dimensions (inches)						
	AxB	C	D	EFG	H	I	Back PanelSub-Panel
6x6x4	4.25x4.25	6.75	6.75	5.75,76.3	5	6.3	4.75x4.75,6.25x5.625
8x6x4	6.25x4.25	8.75	6.75	9.45,78.3	5	6.3	6.75x4.75,6.25x5.625
10x8x4	8.25x6.25	10.75	8.75	11.46,210.3	5.5	8.3	8.75x6.75,6.25x5.625
12x10x6	10.25x8.25	12.75	10.75	13.47,712.3	7	10.3	10.75x8.75,11.625x9.625
14x12x6	12.25x10.25	14.75	12.75	15.47,714.3	7	12.3	12.75x10.75,13.625x11.625
16x14x8	14.25x12.25	16.75	14.75	17.49,716.3	9	14.3	14.75x12.75,15.625x13.625
18x16x10	16.25x14.25	18.75	16.75	19.411,718.3	11	16.3	16.75x14.75,17.625x15.625

Engineering Properties

Typical Properties	Typical Values Unit	Standard
Flammability (resin/component)	V-0 / 5V-A	UL 94
UV-light	F1	UL 746C
Enclosure Types	3R, 4, 4X, 12	UL 508A / UL50E
Falling Dart Impact (D 3029), 73°F	1480 in-lb	ASTM D 3029
Izod Impact, unnotched, 73°F	60 ft-lb/in	ASTM D 4812
Tensile Impact, Type " " S" "	250 ft-lb/in²	ASTM D 1822
HDT, 264 psi, 0.250" " , unannealed	270 °F	ASTM D 648
CTE, flow, -40°F to 200°F	3.8E-05 1/°F	ASTM E 831
Flexural Stress, yld, 0.05 in/min, 2 in span	13100 psi	ASTM D 790
Normal Temperature Range	-40 – 260 °F	
Volume Resistivity	>1.E+17 Ohm-cm	ASTM D 257

